



NOTES


1. MAINTAIN THICKENED DEPTH THROUGHOUT
2. ALL DIMENSIONS ARE IN MILLIMETRES
3. REINFORCEMENT AND THICKENING NOT REQUIRED AT PRIVATE CROSSING.
4. MINIMUM DEPTH OF CROSSING TO BE 1.4m IF PLACED WITHOUT SIDEWALK.

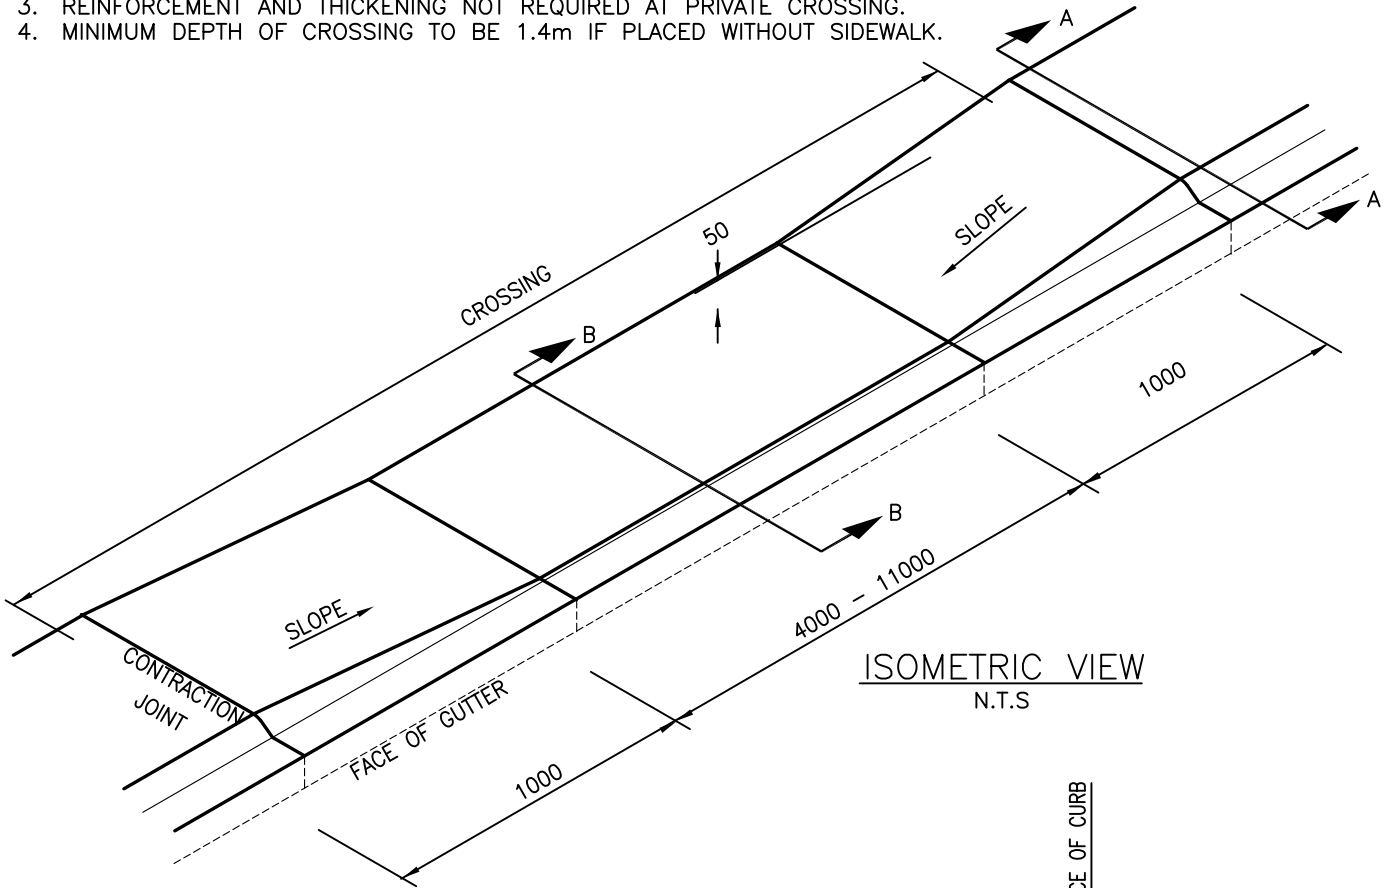

ISOMETRIC VIEW
N.T.S

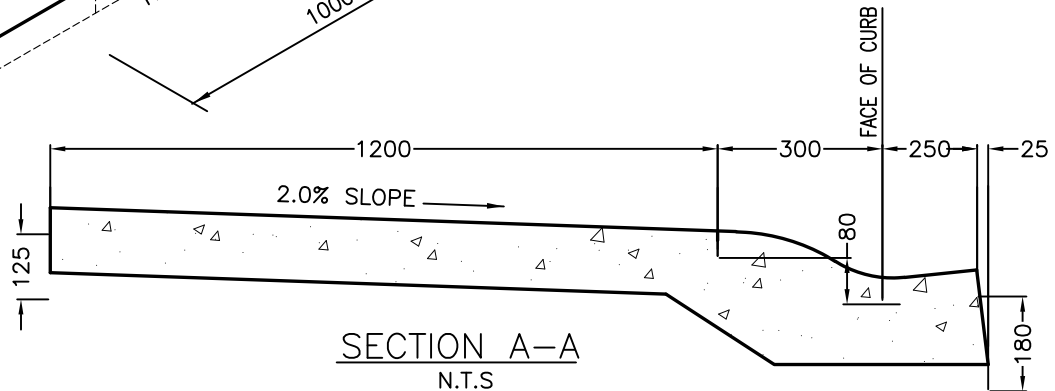

SECTION A-A
N.T.S

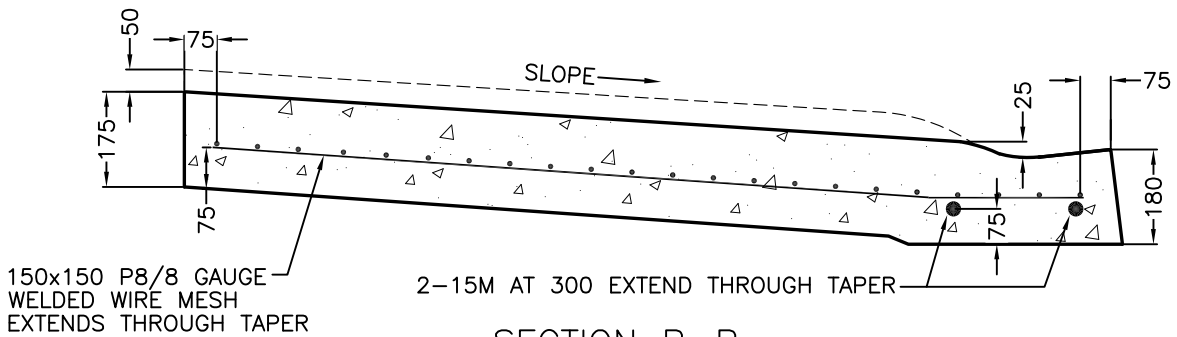

SECTION B-B
N.T.S



**ROLLED MONOLITHIC CROSSING DETAILS
COMMERCIAL, LANE & PRIVATE**

STD DWG

B4.0

DATE: JANUARY 2007