



TYPICAL CULVERT INSTALLATION
N.T.S.

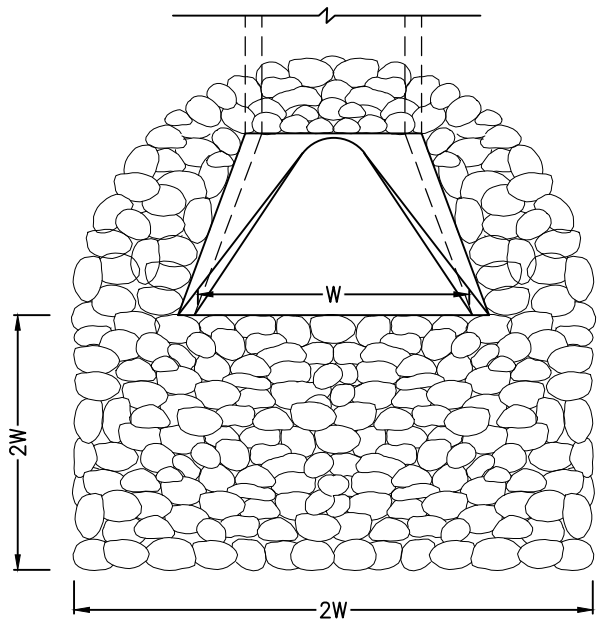

PLAN VIEW
N.T.S.

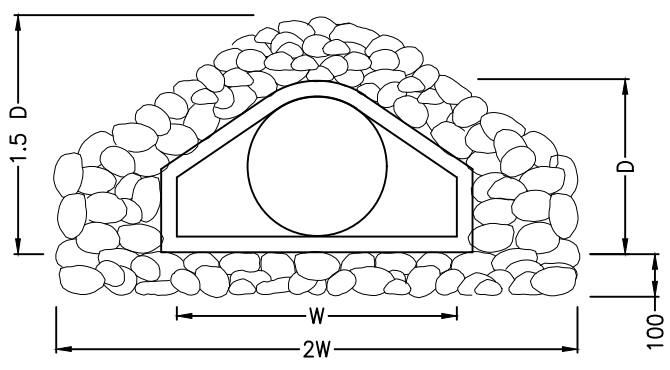

END VIEW
N.T.S.

- NOTE:
1. FLARED END TO SUIT PIPE (CSP OR CONCRETE)
 2. RIP RAP TO BE HAND PLACED – 150mm MIN. DIA.
 3. RIP RAP SHALL BE HAND PLACED ROCK AS SPECIFIED BY THE ENGINEER.
 4. THICKNESS 300mm (D SMALLER THAN 1400mm)
THICKNESS 600mm (D=1400–2000mm)



TYPICAL CULVERT INSTALLATION DETAIL
WITH FLARED END TREATMENT

DATE: OCTOBER, 2020

STD DWG

D3.2