

☉ OF ROAD


EDGE OF PAVEMENT
OR SHOULDER OF ROAD

600


200x350 BLOCKING

1.0m MIN.

SECTION
N.T.S

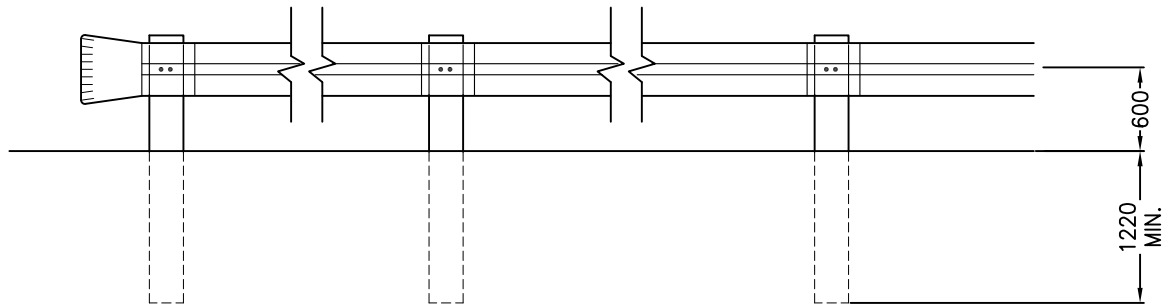

ELEVATION
N.T.S

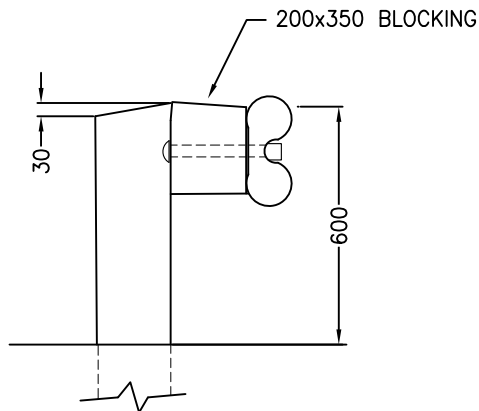

- 16mm GALV. STEEL WASHER
- 16mm GALV. STEEL BOLT
- 16mm GALV. STEEL NUT
- LINE POSTS 200x200x2000
- GUIDE RAIL AS SPECIFIED
- POST SPACING: 1.9 m > 50 Km/h
- 3.81 m < 50 Km/h

NOTE:

1. ALL LAPS TO BE MADE IN DIRECTION OF TRAFFIC.
2. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.



TYPICAL GUIDE RAIL DETAILS FOR BARRIERS
AND LOW SPEED TRAFFIC INSTALLATIONS

DATE: JANUARY 2007

STD DWG

E1.3